

 **Mórgan®**


 **Mórgan®**



E-mail: electrical.appliance@dksh.com
www.morgan.my

 facebook.com/morganappliances

USER MANUAL

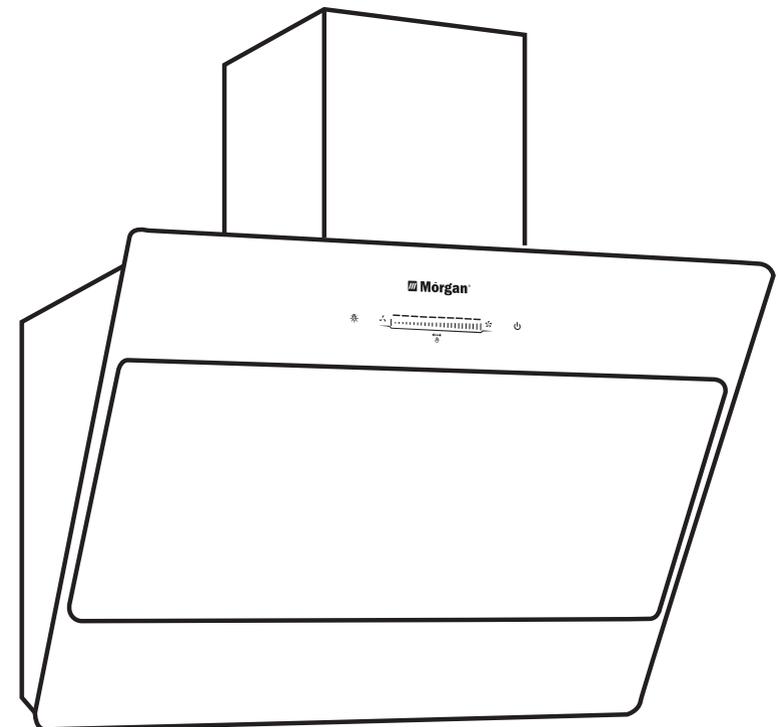

Designer Hood

MDH-950ST

C O N T E N T S

- 3** IMPORTANT NOTES
- 3** SPECIFICATIONS
- 4** INSTALLATION
- 5** OPERATING INSTRUCTIONS
- 5** IMPORTANT
- 6** CONTROL PANEL
- 7** MAINTENANCE AND CLEANING

IMPORTANT NOTES

Thank you for purchasing a quality MORGAN range hood. We trust that you will have a pleasant cooking experience with your new product. To guarantee safety and best efficiency, please read this manual carefully and keep a copy for future reference.

ATTENTION

This user manual includes general instructions for the installation, use and maintenance of your range hood.

It will be extremely useful to know the operation of the appliance so that you will enjoy the benefits of it and assure you the best results.

Keep this user manual handy.

SPECIFICATIONS

DIMENSIONS

WIDTH (CANOPY)	900mm
HEIGHT (WITH CHIMNEY)	582 + (450+500)mm
DEPTH (CANOPY)	435mm

SPECIFICATIONS

MODEL	MDH-950ST
MATERIAL	Black Stainless Steel + Black Tempered Glass
VOLTAGE / FREQUENCY	240V~ 50Hz
TRANSMISSION STYLE	Single Motor
LED LIGHTING POWER (LAMP)	2 x 1.5W
CONTROL	3 Speed Slider Touch Switch
FILTER	2 x Washable 5 Layers Aluminium Grease Filter
MOTOR SPEED (rpm)	3 Speed (H: 1500 Mid: 1300 Low: 1050)
MOTOR POWER	183W
EXTRACTION CAPACITY	1300m³/hr

INSTALLATION

INSTALLERS GUIDE

- The appliance must be installed by qualified professionals only.
- Before installing the range hood, ensure that the appliance is correctly preset for the local conditions (voltage and power plug).
- For safety reasons, remove all packing materials (plastic bags, screws, metal strips etc.) and keep them away from the reach of young children.
- Do not attempt to alter or modify the technical features of the range hood as this can pose a safety hazard. The manufacturer will not be responsible for eventual damages, due to failure to observe the above instructions.
- This range hood has been designed to be wall-mounted above a Gas stove/Hob. Before commencing installation, consideration should be given to how the installation is to be carried out, and ensuring adequate space and clearances above the Gas stove/Hob.
 - a) Position of the flue.
 - b) Availability of earthed power.
 - c) The mechanical strength of supporting structures.
- We will always supply the best quality materials and we are confident that you will be satisfied with our product.

INSTALLATION

1. Use an electrical drill a diameter of 8mm.
2. Locate the two screw holes for the mounting brackets. The screw holes must be perfectly horizontal, and the centre hole must be aligned with the proposed centre of the range hood.
3. Drill the holes and insert the wall plugs.
4. Secure the wall bracket to the top two holes drilled in the previous step using the screws provided.
5. Rivet the flexible ventilation pipe to the cover with the screws to hang the main frame.
6. Install the flexible pipe. Ensure the pipe is kept in its natural state. Ensure the joint is air-proof. Minimize the number of bends and elbows to maximize the efficiency of the appliance.

Notes:

- **The wall shutter is not included in the carton.**
- **The range hood can be ducted through a roof or through a wall.**

OPERATING INSTRUCTIONS

FIRST TIME OPERATING INSTRUCTIONS

It is recommended to follow these instructions before operating it for the first time:

1. Install the oil cup by inserting it from the back to the front.
2. Insert the power plug into the power supply. A beep will be heard when first switched on.
3. Press the power on. Press the lamp button lightly. Test to see if the lamp functions properly.
4. Press the lamp button to switch off.
5. Press the fan speed buttons to ensure that the motor functions properly.

IMPORTANT


Shut off power completely if the following abnormalities are found during the above test:

1. Mainframe shakes
2. Inflated pipe becomes flexible
3. Motor makes an abnormal noise.
 - Press the power switch to stop operations.
 - Any repairs (including damage to main supply) should be repaired by an approved service technician. It is **IMPORTANT** that only original parts should be used.
 - Failure to follow the advice can affect the safety of your appliance.

IMPORTANT

1. Any installation work must be carried out by a qualified professional or competent person.
2. Install the side suction range hood on the wall above the Gas Stove/Hob firmly. Ensure a distance of at least 350mm between the range hood and the Gas Stove/Hob. Install the top suction with curve glass. Ensure a distance of at least 700-900mm between the hood and hob.
3. Ensure that the ventilation pipe can reach the open air or enter into a cold air suction flue and check the joints are airtight.
4. Earth the power supply (to be performed by a qualified electrician only).
5. The gas expelled from the range hood should not be discharged into the flue which is used to discharge the smoke produced by burning coal gas or other fuels.

CONTROL PANEL

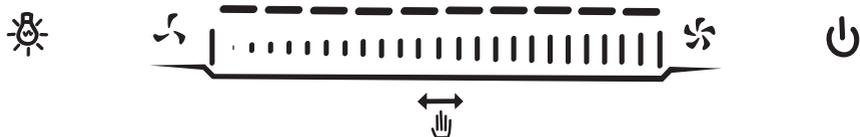

FROM LEFT TO RIGHT KEYS:

K1 Light K2 3 speeds slide from Low-Medium-High K3 Power

1. Connect the hood to electricity power, hood starts auto inspect for 1 second, and come into standby mode.
2. Speed control: press the Power button and it will illuminate. control the speed by sliding on the switch steps, the corresponding speed will start working. Sliding from left to right will increase the speed, and the far right side is the maximum speed. Sliding from right to left will decrease the speed while the far left side is to stop the speed. Corresponding indicator light will lit during the sliding.
3. Delay-off control: press the Power button when the fan is on (any speed), the Power button will blink and the hood fan will automatically turn off after 60 seconds. Lights will be turned off simultaneously.
4. Light control: press the Light button once to turn the hood lights on. Pressing the Light button again will turn them back off.

MAINTENANCE & CLEANING

1. Clean the mainframe and the filters regularly.
2. There are two variations of inlet filters on these models. Both are removable by pulling the lever on the adage of the filters and lifting them out of the slots which hold them.
3. Wash the filters in a dishwasher, or by hand using household dishwashing liquid and clean it with a soft brush.
4. Allow filters to dry thoroughly before reinstalling them.
5. When reinstalling, ensure the filters are inserted in their correct positions.
6. Wipe excess dirt on the mainframe with a wet cloth and mild detergent. Wipe dry using a clean towel.
7. Do not use abrasive cleaners or other harsh cleansing agents as these will damage the surface.
8. Commercial stainless steel cleaning products are available for cleaning stubborn stains.
9. Wash the grease filters on a regular basis. It is recommended to wear gloves during cleaning.
10. Empty the oil and wash it clear before the oil cup is full.
11. Empty excess oil when the oil reaches 2/3 inside the oil cup.
12. If the range hood is unused for a long period of time, unplug it from the power supply.
13. Ensure power is turned off when cleaning the range hood to prevent accidents.