


 **Morgan®**

USER MANUAL

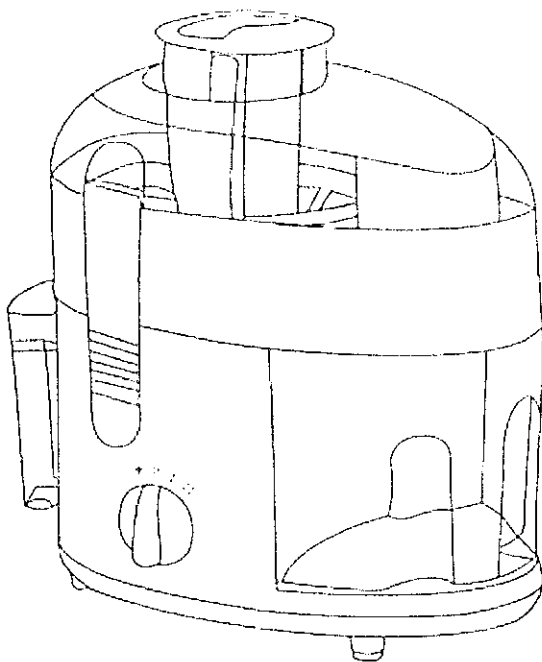

**Juice
Extractor**

MJE-AA03W

CONTENTS

PARTS IDENTIFICATION


1 Parts Identification

1 Specifications

2 Safety Precautions

3 Operating Instructions

4 Care and Cleaning

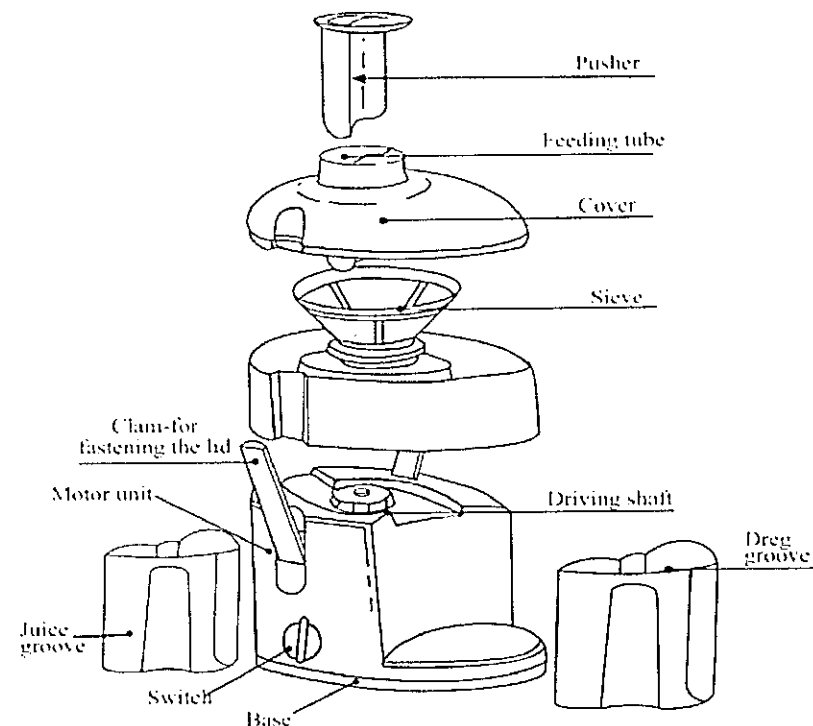

SPECIFICATIONS

RATED VOLTAGE	220-240V~
RATED POWER	250W
FREQUENCY	50Hz

- 1) Always operate the juicer/blender on a flat, sturdy table, and operate it according to the following requirements.
- 2) To operate juicer/blender, always ensure that it is free from residue. If juicer slot contains residue, turn off the power and clear residue before operating the appliance.
- 3) Always ensure the filter dish and the drive wheels are secured in the right positions and without any hard contact between the filter blade and the exterior cap. Cover the exterior cap and fasten it by the free buckle before use.
- 4) Do not uncover the juicer cap during operation and never insert your fingers or other objects into the juicer feed inlet before switching off the power to avoid damage or injury.
- 5) The juicer/blender has a built-in overheating protector that will turn off the power immediately when the motor is overheated or overloaded due to prolonged operation. If this happens, switch off power and allow unit to cool down (about 30 minutes) before resuming operation.
- 6) It is strictly forbidden to put any accessory into the high-temperature sterilization.
- 7) This juicer/blender is intended for household use only.
- 8) Never leave the blender unattended while in operation and always exercise caution when it is used near children.
- 9) Never operate the juicer/blender when empty nor overload it during mixing, blending or grinding
- 10) Switch off and unplug from power outlet before dispensing food.

DISMANTLING AND ASSEMBLY

- 1) Turn the switch to OFF position and open the fastened clamps.
- 2) Remove the cover.
- 3) Remove the groove unit then pull the sieve upward.
- 4) Place the groove unit onto the motor unit, push with both hands on the groove unit until it is clicked into place.
- 5) Insert the sieve; turn it clockwise until it sets securely.
- 6) Mount the motor and fasten the clamps.
- 7) Place the residue container under the residue spout and the juice container under the juice spout.

USING THE JUICER

- 1) Be sure clamps are fastened in position and the switch is the OFF position before connecting it into the power outlet
- 2) Cut fruits into small pieces so that they can be easily fitted into the feeding tube.
- 3) Remove stones or peels from citrus fruits: peaches, prunes, apricots, oranges, lemons, melons etc.
- 4) Switch on the power and feed the pre-prepared fruits and vegetables into the juice extractor. Press down gently using the plunger. Never use your fingers to push in the fruits.
- 5) Use the pulse switch (*) for quick or short period juicing.
- 6) Fruits or vegetables can be fed in continuously without having to switch off the appliance.

CARE AND CLEANING

- 1) This juicer/blender should be used often to ensure prolonged operation.
- 2) If the blender is not used for a long time, store it in a well-ventilated place to prevent the motor from dampness and going mouldy.
- 3) Do not immerse the motor housing into water or any other liquids. Wipe it with a dry cloth. Wash other parts with water and food-safe detergent.
- 4) Detach the juicer, blending and grinding blades. Lubricate them with a little vegetable oil to guarantee the smooth operation and performance of your juicer/blender.
- 5) To clean the juicer - use warm water and several drops of food-safe detergent. Cover the cap, switch on the unit and let it run for 10 seconds. Alternatively, soak the juicer in water and clean it using a soft brush.